


JAE SMART DM175°C



JAE's SMART DM is a ruggedized directional module designed for continuous downhole operation. Engineered for utmost quality & reliability, using JAE's proprietary sensor technology, the SMART DM is a full-featured system. It has the ability to measure dynamic inclination and azimuth, multi-axis shock and vibration, and downhole RPM for optimized drilling performance. With the addition of an optional integrated Azimuthal Gamma Controller feature, the SMART DM is a "plug & play" solution for most current & legacy Directional Modules, while incorporating the latest technology.


Standard SMART DM Features

- Digital Directional Module
 - MWD microcontroller/microprocessor
 - 24-bit ADC for precise 6-axis surveys
 - Calibration coefficients stored on-board
- M-ary Telemetry protocol
- Dynamic sequences (ability to send rotating/sliding frames)
- Flow & Rotation downlink
- Smart power management, Efficient battery switching
- Multiple communication protocols supported: CAN, UART, & Q-bus
- Control MWD tool string: Pulser, Gamma, Resistivity
- Configurable tool orientation and axis notation
- Internal Logging Memory
 - Operational time and environmental history
 - Lifetime Environmental history

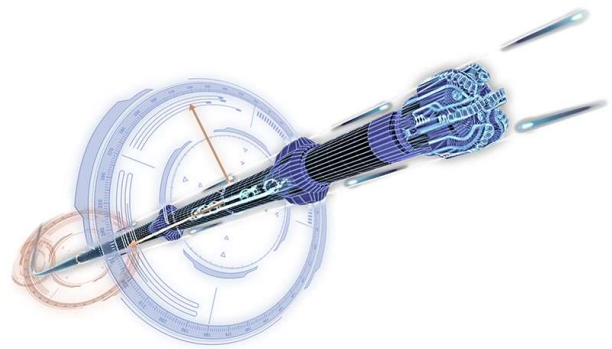

SMART DM Key Features

- 175°C Maximum Operating Temperature
- MCM Magnetometer Package
- Integrated Azimuthal Gamma Controller
- Dynamic Inclination and Dynamic Azimuth
- Real-time shock and vibration
- RPM Measurement and Stick Slip Indicator

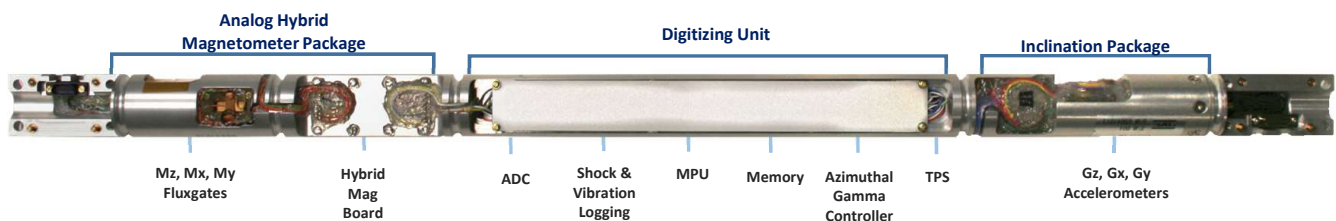

JAE SMART DM 175°C

Performance Specifications	Parameter	Specification	Typical*
	Inclination:	$\pm 0.10^\circ$	$\pm 0.01^\circ$
	Azimuth:		
	@ 90° INC	$\pm 0.25^\circ$	$\pm 0.03^\circ$
	@ 10° INC	$\pm 0.50^\circ$	$\pm 0.07^\circ$
	@ 5° INC	$\pm 1.00^\circ$	$\pm 0.12^\circ$
	Dip Angle	$\pm 0.20^\circ$	$\pm 0.02^\circ$
	Total Gravity field	± 1.25 mG	± 0.10 mG
	Total Magnetic Field	± 125 nT	± 12 nT
	Toolface	$\pm 0.20^\circ$	
* Based on the average of 200 units tested			

Electrical, Mechanical Environmental Specifications	Length:	29.2"
	Diameter:	1.36"
	Operating Temperature:	-20C to +175C
	Survival Temperature:	-40C to +185C
	Vibration, Random:	20G RMS, 10-500 Hz
	Shock:	500G, 1mSec, half-sine
	Operating voltage range:	18V-32V
	Current @ 28V:	125 mA max
	Memory:	24MB

SMART SERIES

JAE SMART DM

JAE's SMART DM incorporates the most-advanced, highly-reliable downhole-ready electronics. Includes advanced environmental logging features for analysis of data up-hole.

	SMART DM Plus	SMART DM One
Description	Raw/Calculated Values; Triple Power Supply & Slave MPU	SMART Directional Module, Triple Power Supply & Master MPU
Features	SMART DM + TPS + MPU	SMART DM + TPS + MPU
Mud Pulse Encoding (M-ary)		✓
Communicates w/: resistivity, custom sensors		✓
Azimuthal Gamma Controller	✓	✓
Communication Protocols		
CAN	✓	✓
UART	✓ Optional	
Q-bus		✓
Drilling Dynamics		
Axial & Lateral Vibration and Shock	✓	✓
Temperature	✓	✓
Rotation Detection		✓
RPM & Stick/Slip	✓	✓
Downlinking		✓
Continuous Inclination	✓	✓
Continuous Azimuth	✓	✓
Life Time Logging	✓	✓

Contact Us

https://www.jae.com/en/Motion_Sensor_Control/



JAE Electronics, Inc. (USA)

1100 West Park One Dr.
Sugar Land, TX 77478 USA
Tel : +1 281 325 5760
support.aerospace@jae.com

JAE Europe, Ltd.

Royal Pavillion, Tower 3, First Floor, Wellesley Road,
Aldershot, Hampshire, GU11 1PZ, UK
Tel : +44 1252 55 11 00 Fax : +44 1252 55 11 10

Japan Aviation Electronics Industry, Ltd. (Japan)

Aerospace Sales Div.
1-19, Aobadai 3-chome, Meguro-ku, Tokyo 153-8539, Japan
Tel : +81-3-3780-2925 Fax : +81-3-3780-2945

SMART DM_DS_01, Issue 02, 2/2/2021 (Documentation number) - This information is subject to change prior to notice - SMART DM must only be exported in accordance with all relevant regulations.

JAE Aerospace Div. Proprietary - Copyright© 2020, Japan Aviation Electronics Industry, Ltd.